

Wideband Surface Mount Speaker for Clear Communication

The 8189 IP Surface Mount Speaker is a SIP-compliant and multicast-capable PoE network speaker designed to deliver clear voice paging, emergency notification, loud ringing, and background music.



The 8189 IP Surface Mount Speaker is a network speaker designed to deliver excellent audio quality in surface mount applications. Featuring wideband audio, Algo ceiling speakers provide enhanced speech clarity and intelligibility for indoor locations, such as offices, classrooms, and hallways.

Featuring wideband audio, Algo surface mount speakers provide enhanced speech clarity and intelligibility in most indoor locations, such as offices, classrooms, and hallways.

Leveraging multicast, the 8189 can simultaneously broadcast live voice or active ringtone over the network to other Algo IP speakers (including additional 8189s) and IP visual alerters either all at once or in zone groups.

An embedded microphone allows the 8189 to monitor ambient noise where volume is automatically adjusted according to background noise levels for paging and alerting. The microphone may also be used for two-way talkback.

The 8189 contains 1 GB internal memory and is pre-loaded with several commonly used audio files for ring sounds. Users may also record or upload custom audio files, such as music, sound effects, or voice announcements.

As a 3rd-party, SIP-compliant speaker, the 8189 integrates into most leading UC, Collaboration, and Mass Notification platforms. The surface mount speaker supports Secure SIP (TLS & SRTP), secure provisioning, and web configuration (HTTPS).

FEATURES

- Wideband HD audio (G.722 voice codec) for high intelligibility speech
- Secure SIP using TLS and SRTP
- Configurable via user-friendly web interface or auto-provisioning
- Ambient noise response to automatically adjust audio output level
- Two-way talkback
- Multicast send and receive
- Configure up to 50 page zones
- PoE powered (IEEE 802.3af)
- Class-D Amplifier
- Smart relay input for accessories
- Upload custom audio files for announcements and alert tones

APPLICATIONS

- Voice paging
- Emergency and safety notifications
- Background music
- Loud ringing
- Zoned paging and notifications
- Suitable environments include: office, hallway, classroom, reception area, workshop, cafeteria.
- The 8189 is ideal for installing on hard surfaces (for in-ceiling installation, see the 8188)

POWER	
POWER SOURCE	PoE (IEEE 802.3af Class 0) 48 V, 15.4 W
MAX POWER (AT DEVICE)	12.95 W
IDLE POWER	2.5 W
SIP	
SIP EXTENSIONS	<ul style="list-style-type: none"> • 50 Page (Capable of hands-free talkback) • 10 Emergency Alert • 10 Ring
SIP SIGNALLING/ TRANSPORT PROTOCOLS	UDP, TCP, RTP
SECURITY	TLS, SRTP, Mutual Authentication
AUDIO CODECS	G.711 u-law, G.711 A-law, G.722 Wideband
MULTICAST	
RTP MULTICAST	Send and Receive 50 Zones
AUDIO CODECS	G.711 u-law, G.711 A-law, G.722 Wideband, Opus Fullband
COMPATIBILITY	
THIRD PARTIES	<ul style="list-style-type: none"> • RESTful API • Poly Group Page™ • InformaCast® (additional license required) • Intrado Revolution® • Microsoft Teams®
CONFIGURATION & PROVISIONING	
CONFIGURATION	Web interface or provisioning server
WEB INTERFACE	HTTP, HTTPS
PROVISIONING	<ul style="list-style-type: none"> • TFTP, FTP, HTTP, HTTPS • DHCP Options 66, 150, 160 • Reboot via SIP 'check-sync'
ZTP	Supported
SUPERVISION	Compatible with Algo Device Management Platform (ADMP), Algo 8300 IP Controller, any third-party SNMP monitoring software, and RTCP
NETWORKING	
NETWORKING	IPv4, IPv6, DHCP, VLAN, MDNS
LINK LAYER	LLDP, CDP
SECURITY	IEEE 802.1X
QOS	DSCP
NAT	STUN, TURN, CRLF Keep Alive, SIP Outbound
ADDRESS RESOLUTION	DNS, SRV Record
REDUNDANCY	Secondary and tertiary SIP server
TIME	NTP Server (up to four)
AUDIO	
SPEAKER	6.5" (16.5 cm) coaxial with PEI dome tweeter. Mica filled polypropylene cone.
SPL	97 dBA (1 kHz, 8 W, 1 m)
MICROPHONE	Omnidirectional - talkback and ambient noise monitoring
AUDIO MEMORY & FORMAT	1 GB audio storage for WAV or MP3 files
AUDIO CONTROLS	Volume, AGC, Latency, LF Cut
ANTI-FEEDBACK DELAY	Cache to memory and release
AUDIO DELAY	Programmable 1-1000 ms synchronization delay (in multicast receiver mode)
MAX AUDIO POWER	8 W
INPUT/OUTPUT	
RELAY INPUT	Normally open or normally closed dry contact with supervision. Algo 1202 Call Button, 1203 Call Switch, 1204 Volume Control, EOL termination.
RELAY OUTPUT	Max 30 V 50 mA (normally open)

RELAY INPUT CURRENT DRAW DETECTION			
THRESHOLD	ACTIVE	IDLE	TAMPER
NORMALLY OPEN	> 4 mA	< 4 mA	N/A
NORMALLY OPEN WITH SUPERVISION	> 20 mA	4-20 mA	< 4 mA
NORMALLY CLOSED	< 4 mA	> 4 mA	N/A
NORMALLY CLOSED WITH SUPERVISION	4-20 mA	> 20 mA	< 4 mA
NOMINAL 12 V SOURCE, CURRENT LIMITED TO 40 MA		Typical supervision resistor value = 1 kΩ	

ENVIRONMENTAL & MECHANICAL

ENVIRONMENTAL 0 to +40 deg C (32 to 104 deg F); 10-95% RH non-condensing. Dry indoor locations only.

DIMENSIONS (PRODUCT) 12" x 12" x 3.4" (30.5 cm x 30.5 cm x 8.6 cm)


WEIGHT (PRODUCT) 7.0 lbs (3.2 kg)

WEIGHT (SHIPPING) 8.0 lbs (3.6 kg)

MOUNTING Surface mountable on a solid wall using the included back box

COMPLIANCE

RoHS, CE, FCC Class A, CISPR 22 Class A, CISPR 24, CSA/UL (USA & Canada), EN60950

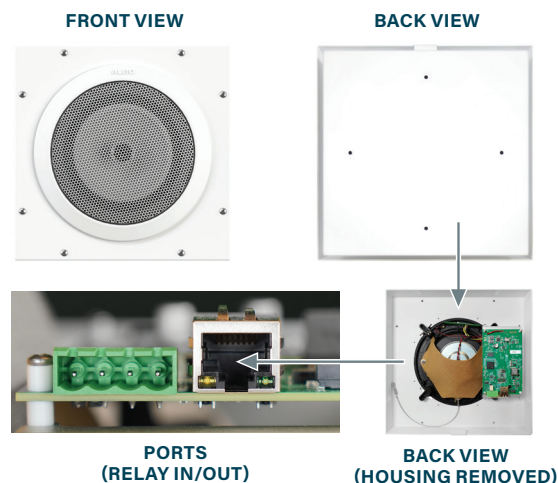

ORDERING CODES:

8189 IP Surface Mount Speaker
8189-IC IP Surface Mount Speaker InformaCast

COMPATIBLE ACCESSORIES:

8188MEM Hydrophobic Membrane Screen
1202 Call Button
1203 Call Switch
1204 Volume Control
2507 Ring Detector

